


# GLASSWASHER E40H ECO



- Electrical connection
- Cold water inlet
- Hot water inlet
- Water drain

## STANDARD FEATURES

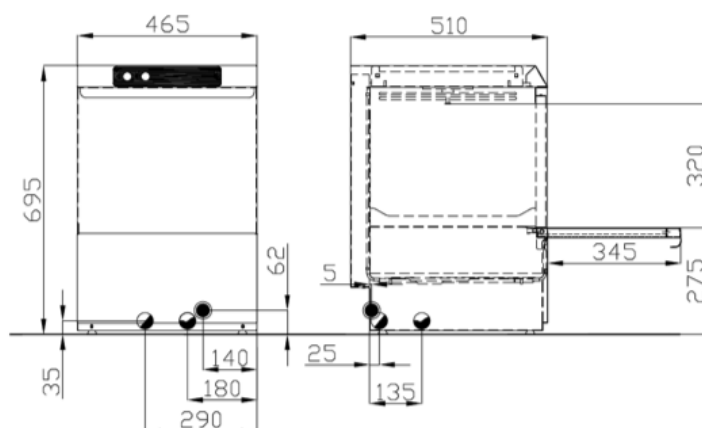

- Single-skinned cabinet with double-skinned door.
- Wash pump fixed directly to the tank.
- Easy-clean-filter system.
- Stainless-steel wash arm and two rinse arms of composite material, all independent and rotary.
- Tank and door made of stainless steel AISI 304.
- Adjustable rinse aid dosing unit
- Micro security door.
- Electromechanical control panel.

## TECHNICAL FEATURES

Electromechanical control panel	(sec.)	Baskets/h
Cycle*	120	30
Basket size	400 x 400 mm	
Wash pump power/capacity	0,17 kW / 109 l/min	
Element power: tank/boiler	1,6 kW / 2,8 kW	
Water supply temperature/pressure/hardness	max. 55°C / 200-400 kPa / min. 7 max. 12°f **	
Washing/Rinsing temperature	55°C / 85°C	
Capacity: tank/boiler/water consumption per cycle	14 l / 2,7 l / 2,4 l	
Sound emission dB (A)	48	
Total power/Voltage	2,97 kW / 230 Volt 1 ~50 Hz	

\*Theoretical data with water supply at 50°C

\*\*Where water hardness exceeds 12°f or 100ppm a water softener is required. Water softener is not suitable for hot water above 30°C.

## ACCESSORIES

Baskets	1 universal basket, 1 cutlery rack
Hoses (1 for each)	Water connection, drain, transparent rinsing product

## OPTIONAL ADD-ONS

- Peristaltic detergent dosing unit (PD) identified by a red hose.
- Peristaltic rinse dosing unit (PB).
- Integral drain pump (PS).
- Integral water softener (A).
- Stainless-steel rinse arm (RI).

All data, photos or indications on this technical sheet are given for information and have no contractual value. They are subject to change without notice.

SILANOS s.r.l. Via Grandi, 19 - 20096 Pioltello MI - Italy • T. +39 029291161 F. +39 029267306 info@silanos.it www.silanos.it