


PASSTHROUGHS NE1300 ECO



- Electrical connection
- Cold water inlet
- Hot water inlet
- Water drain

STANDARD FEATURES

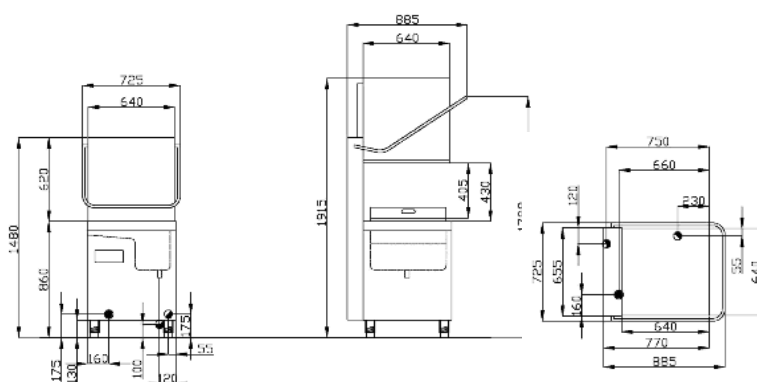

- Single-skinned machine.
- Easy-clean-filter system.
- Two stainless-steel wash arms and two rinse arms of composite material, independent and rotary, removable without tools.
- Wash tank inclined to filters.
- Self-draining inclined wash pump.
- Tank and hood made of stainless-steel AISI 304.
- Adjustable rinse aid dosing unit.
- Auto-start hood.
- Electromechanical control panel.

TECHNICAL FEATURES

	(sec.)	Baskets/h	Plates/h**
Electromechanical control panel			
Washing cycle I*	75	48	864
Washing cycle II*	120	30	540
Washing cycle III*	180	20	360
Basket size	500 x 500 mm		
Wash pump power/capacity	1,1 kW / 503 l/min		
Element power: tank/boiler	3 kW / 6 kW		
Water supply temperature/pressure/hardness	max. 55°C / 200 - 400 kPa / min. 7 max. 12°f ***		
Washing/Rinsing temperature	55°C / 85°C		
Capacity: tank/boiler/water consumption per cycle	30 l / 7 l / 2,8 l		
Sound emission dB (A)	69		
Total power/Voltage	7,1 kW / 400 Volt 3/N/50 Hz		

*Theoretical data with water supply at 50° C **Depending on dish dimensions

***Where water hardness exceeds 12°f or 100ppm a water softener is required. Water softener is not suitable for hot water above 30°C.

ACCESSORIES

- Baskets 1x18 plate, 1 universal basket, 1 cutlery rack
- Hoses (1 for each) Water connection, drain, transparent rinsing product

OPTIONAL ADD-ONS

- Peristaltic detergent dosing unit (PD) identified by a red hose.
- Peristaltic rinse dosing unit (PB).
- Integrated drain pump (PS).
- Water softener included (A).
- Stainless-steel rinse arm (RI).

All data, photos or indications on this technical sheet are given for information and have no contractual value. They are subject to change without notice.

SILANOS s.r.l. Via Grandi, 19 - 20096 Pioltello MI - Italy • T. +39 029291161 F. +39 029267306 info@silanos.it www.silanos.it