


GLASSWASHER S28 DIGIT 2



- Electrical connection
- Cold water inlet
- Hot water inlet
- Water drain

STANDARD FEATURES

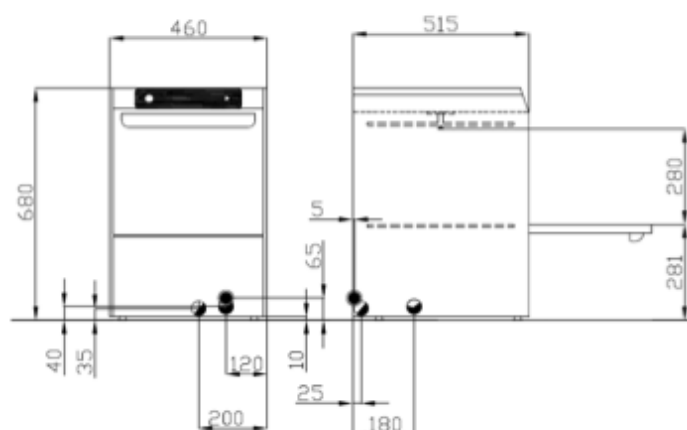

- Double-skinned cabinet and door.
- Wash pump fixed directly to the tank.
- Easy-clean-filter system.
- Two stainless-steel wash arms and two rinse arms of composite material, independent and rotary.
- Tank and door made of stainless steel AISI 304.
- Adjustable rinse aid dosing unit.
- Micro security door.
- Four purpose-designed washing cycles for various types of crockery to be washed.
- Cold rinsing programme for beer glasses.
- Pressed basket guides in the tank.
- Digital control panel (DIGIT)

TECHNICAL FEATURES

	(sec.)	Baskets/h
Digital control panel (DIGIT)		
Washing Cycle P1 * (42" washing – 5" pause – 13" rinse)	60	60
Washing Cycle P2 * (102" washing – 5" pause – 13" rinse)	120	30
Washing Cycle P3 * (162" washing – 5" pause – 13" rinse)	180	20
Washing Cycle P4 * (462" washing – 5" pause – 13" rinse)	480	7
Basket size	400 x 400 mm	
Washing pump power/capacity	0,27 kW / 137 l/min	
Element power: tank/boiler	1,6 kW / 2,8 kW	
Water supply temperature/pressure/hardness	max. 55°C / 200-400 kPa / min. 7 max. 12°f **	
Washing/Rinsing temperature	55°C / 85°C	
Capacity: tank/boiler/water consumption per cycle	14 l / 3,5 l / 2,4 l	
Sound emission dB (A)	48	
Total power/Voltage	3,07 kW / 230 Volt 1 ~50 Hz	

*Theoretical data with water supply at 50°C

**Where water hardness exceeds 12°f or 100ppm a water softener is required. Water softener is not suitable for hot water above 30°C.

GLASSWASHER S28 DIGIT 2



ACCESSORIES

Baskets 2 universal baskets, 1 cutlery rack
Hoses (1 for each) Water connection, drain, transparent rinsing product

OPTIONAL ADD-ONS

- Peristaltic detergent dosing unit (PD), identified by a red hose.
- Peristaltic rinse dosing unit (PB).
- Integrated drain pump (PS).
- Water softener included (A).
- Stainless-steel rinse impeller (RI).
- Solenoid for salt discharge.

All data, photos or indications on this technical sheet are given for information and have no contractual value. They are subject to change without notice.

SILANOS s.r.l. Via Grandi, 19 - 20096 Pioltello MI - Italy • T. +39 029291161 F. +39 029267306 info@silanos.it www.silanos.it